



Advanced RF Isolation Variable Beamwidth Antenna

Models: AM-V2G-Ti, AM-V5G-Ti, AM-M-V5G-T

Carrier-Class 2x2 MIMO PtMP BaseStation

Adjustable Beamwidth Configuration

Reduced Co-Location Interference





Advanced Carrier-Class PtMP Basestation Antenna

Introducing the airMAX Titanium Sector, which continues the evolution of Ubiquiti's best-in-class sector antennas. Advanced RF isolation and variable beamwidth configuration put the Titanium Sector at the forefront of sector antenna technology.

Reduced Co-Location Interference

Drawing on Ubiquiti's depth of electrical and mechanical engineering expertise, Ubiquiti has developed the airMAX Titanium Sector to be highly resistant to noise interference in co-location deployments.

Adjustable Beamwidth Configuration

Having adjustable beamwidth options enhances scalability and streamlines inventory. The airMAX Titanium Sector may be custom configured for any deployment requiring a 60°, 90°, or 120° sector.


Antenna gain changes according to the configured beamwidth.

| Model | 60° | 90° | 120° |
|-------------|--------|--------|--------|
| AM-V2G-Ti | 17 dBi | 16 dBi | 15 dBi |
| AM-V5G-Ti | 21 dBi | 20 dBi | 19 dBi |
| AM-M-V5G-Ti | 17 dBi | 16 dBi | 15 dBi |


Increased Performance

The airMAX Titanium Sector was specifically engineered for optimal performance when paired with a Rocket™M Titanium.

- 20% increase in performance with PtMP networks
- Up to 90% performance improvement in a co-location environment
- Increased durability in harsh weather

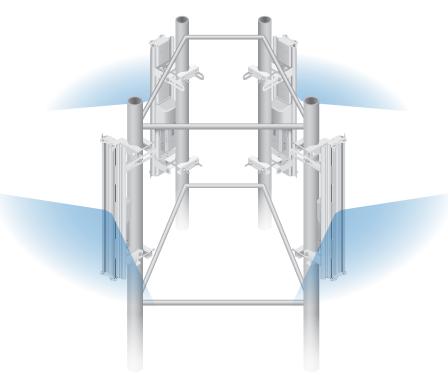


Ideal for Co-Location Deployments

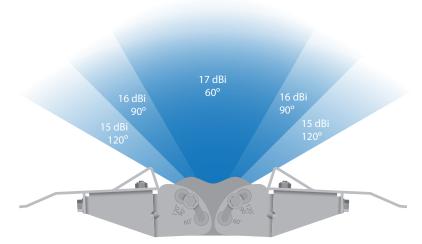

AM-V2G-Ti Adjustable Beamwidth


Easily Mount and Protect Your Rocket

The Titanium Sector has an integrated Rocket mount that allows you to mount the Rocket without the use of any tools. The custom-designed Protective Shroud helps to shield your Rocket from the elements.

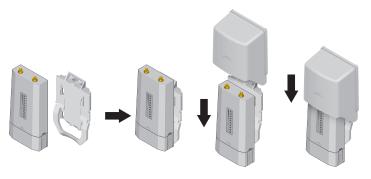



Overview

Model: AM-V2G-Ti

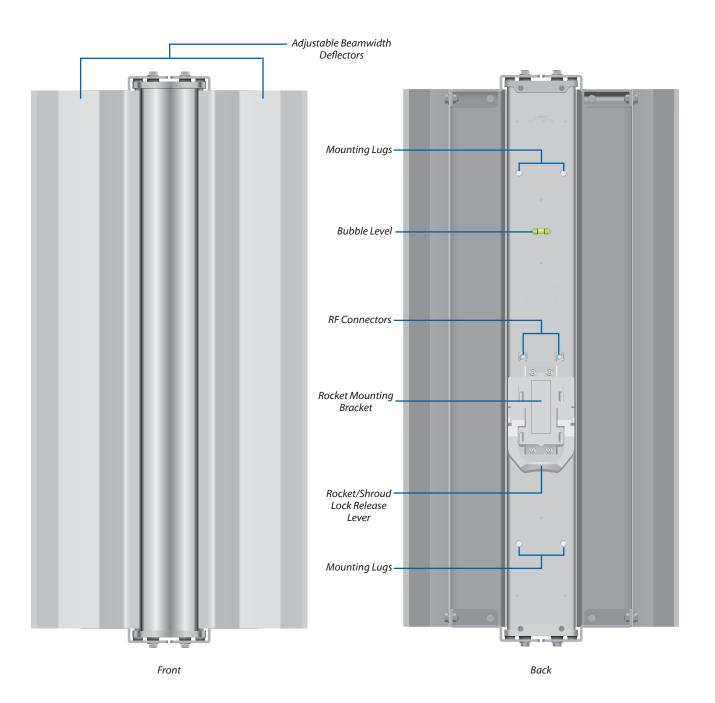

Model: AM-V5G-Ti

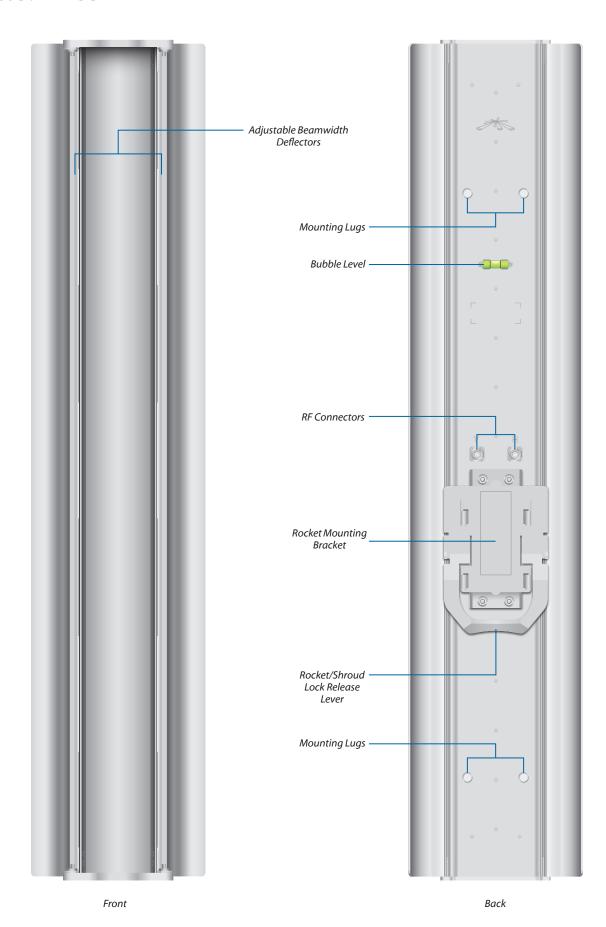

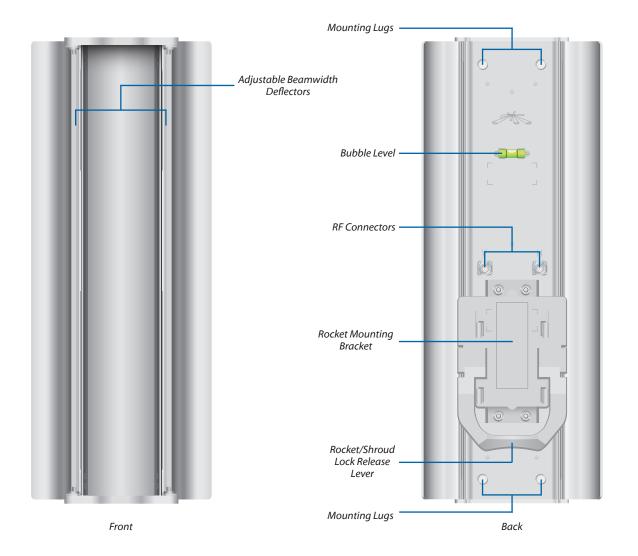

Specifications


| Model: AM-V2G-Ti | | |
|----------------------------|---|--|
| Dimensions | 773 x 372 x 120 mm | |
| Weight | 6.40 kg (with Brackets) | |
| Frequency Range | 2.3 - 2.6 GHz | |
| Beamwidth Angles | 60°/ 90°/ 120° | |
| Gain (Beamwidth Dependent) | 17 dBi @ 60° 16 dBi @ 90° 15 dBi @ 120° | |
| Elevation Beamwidth | 4° | |
| Electrical Downtilt | 4° | |
| Wind Survivability | 125 mph | |
| Wind Loading | 92 lbs @ 100 mph | |
| Polarization | Dual Linear | |
| Cross-Pol Isolation | 25 dB Typical | |
| Front-to-Back Ratio | 30 dB Typical | |
| Max. VSWR | 1.5:1 | |
| RF Connectors | 2 RP-SMA Connectors (Weatherproof) | |
| Compatible Radios | RocketM2 Titanium RocketM2 | |
| Mounting | Pole Mount (Kit Included) | |
| ETSI Specification | EN 302 326 DN2 | |
| Certifications | CE, FCC, IC | |

| Mod | el: AM-V5G-Ti |
|----------------------------|---|
| Dimensions | 721 x 149.1 x 75.7 mm |
| Weight | 3.72 kg (with Brackets) |
| Frequency Range | 5.45 - 5.85 GHz |
| Beamwidth Angles | 60°/90°/120' |
| Gain (Beamwidth Dependent) | 21 dBi @ 60° 20 dBi @ 90° 19 dBi @ 120° |
| Elevation Beamwidth | 4 |
| Electrical Downtilt | 2 |
| Wind Survivability | 125 mpł |
| Wind Loading | 37 lbs @ 120 mpł |
| Polarization | Dual Linea |
| Cross-Pol Isolation | 25 dB Typica |
| Front-to-Back Ratio | 30 dB Typica |
| Max. VSWR | 1.5: |
| RF Connectors | 2 RP-SMA Connectors (Weatherproof |
| Compatible Radios | RocketM5 Titaniun RocketM5 GP: RocketM: |
| Mounting | Pole Mount (Kit Included |
| ETSI Specification | EN 302 326 DN: |
| Certifications | CE, FCC, IC |


Specifications

| Mode | l: AM-M-V5G-Ti |
|----------------------------|---|
| Dimensions | 385 x 149 x 76 mm |
| Weight | 3.25 kg (with Brackets) |
| Frequency Range | 5.45 - 5.85 GHz |
| Beamwidth Angles | 60°/ 90°/ 120° |
| Gain (Beamwidth Dependent) | 17 dBi @ 60° 16 dBi @ 90° 15 dBi @ 120° |
| Elevation Beamwidth | 8° |
| Electrical Downtilt | 3° |
| Wind Survivability | 125 mph |
| Wind Loading | 15 lbf @ 100 mph |
| Polarization | Dual Linear |
| Cross-Pol Isolation | 25 dB Typical |
| F/B Ratio | 35 dB Typical |
| Max. VSWR | 1.7:1 |
| RF Connectors | 2 RP-SMA Connectors (Weatherproof) |
| Compatible Radios | RocketM5 Titanium RocketM5 RocketM5 GPS |
| Mounting | Pole Mount (Kit Included) |
| ETSI Specification | EN 302 326 DN2 |
| Certifications | CE, FCC, IC |


Vertical Azimuth

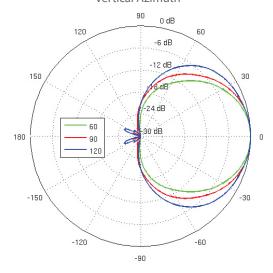


Vertical Elevation

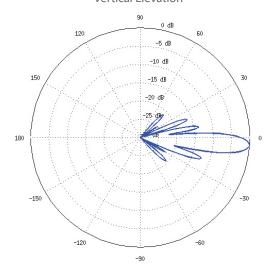


Horizontal Azimuth

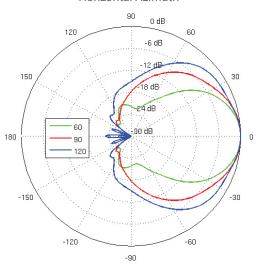


Horizontal Elevation

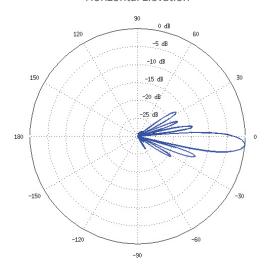


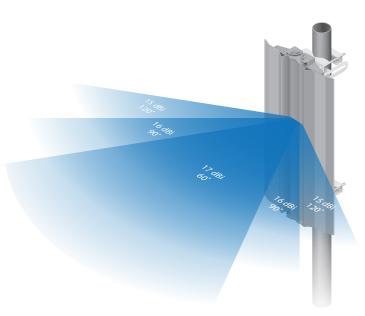


Vertical Azimuth

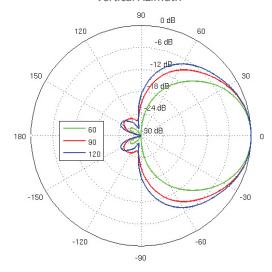


Vertical Elevation

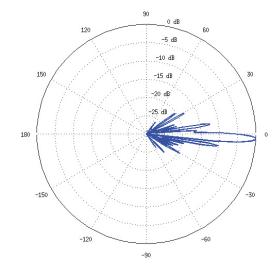


Horizontal Azimuth

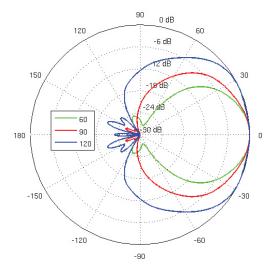


Horizontal Elevation

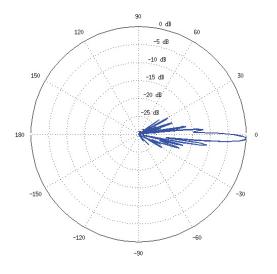


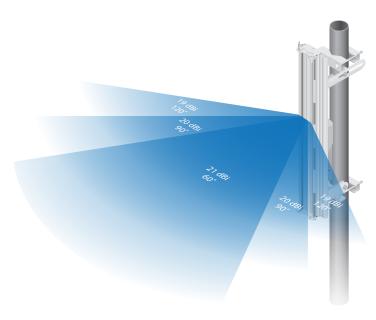


Vertical Azimuth

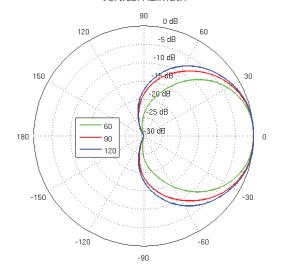


Vertical Elevation

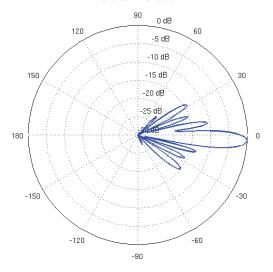


Horizontal Azimuth

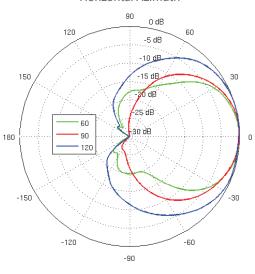

Horizontal Elevation

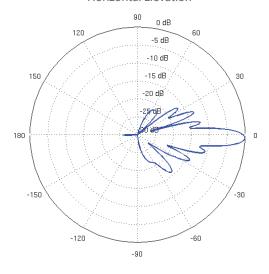

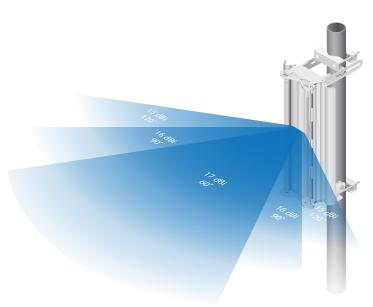

TOUGHCable

OUTDOOR CARRIER CLASS SHIELDED

Protect your networks from the most brutal environments with Ubiquiti Networks' industrial-grade, shielded Ethernet cable, TOUGHCable.

Increase Performance

Dramatically improve your Ethernet link states, speeds, and overall performance with Ubiquiti TOUGHCables.

Extreme Weatherproof

Designed for outdoor use, TOUGHCables have been built to perform even in the harshest weather and environments.

ESD Damage Protection

Protect your networks from devastating electrostatic discharge (ESD) attacks.

Extended Cable Support

TOUGHCables have been developed to increase power handling performance for extended cable run lengths.

Bulletproof your networks

TOUGHCable is currently available in two versions: PRO Shielding Protection and CARRIER Shielding Protection.

TOUGHCable PRO is a Category 5e, outdoor, carrier-class shielded cable with an integrated ESD drain wire.

TOUGHCable CARRIER is a

Category 5e, outdoor, carrier-class shielded cable that features an integrated ESD drain wire, anti-crosstalk divider, and secondary shielding. It is rated to provide optimal performance on Gigabit Ethernet networks.

Additional Information:


- 24 AWG copper conductor pairs
- 26 AWG integrated ESD drain wire to prevent ESD attacks and damage
- PE outdoor-rated, weatherproof jacket
- · Multi-layered shielding
- Available in lengths of 1000 ft (304.8 m)




Specifically designed for use with Ubiquiti TOUGHCables and available in 100-pc. bags, TOUGHCable Connectors protect against ESD attacks and Ethernet hardware damage, while allowing rapid field deployment without soldering.

ESD attacks are the leading cause for device failures. The diagram below illustrates the areas vulnerable to ESD attacks in a network.

By using a grounded Ubiquiti Power over Ethernet (PoE) Adapter along with Ubiquiti TOUGHCable and TOUGHCable Connectors, you can effectively protect against ESD attacks.

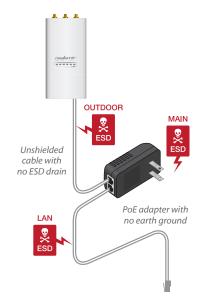

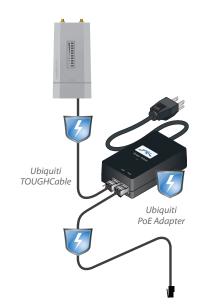

TERMS OF USE: Ubiquiti radio devices must be professionally installed. Shielded Ethernet cable and earth grounding must be used as conditions of product warranty. TOUGHCable is designed for outdoor installations. It is the installer's responsibility to follow local country regulations, including operation within legal frequency channels, output power, indoor cabling requirements, and Dynamic Frequency Selection (DFS) requirements.

For further information, please visit www.ubnt.com.

All specifications in this document are subject to change without notice.

© 2012 Ubiquiti Networks, Inc. All rights reserved.



www.ubnt.com

PHJL122112