



FLEX6Cable™

Outdoor CAT6 Cable
ARC-AF-F6C-R2

IMPROVED
DESIGN!



Outdoor & Industrial Rated




Optional Cable Lock




Breakthrough Affordability

FLEX6Cable™

	1,000 Feet (304.8m)
Cable	CAT6, Shielded (SFTP)
Conductor Wire Gauge	24AWG
Conductor	Solid Bare Copper
Conductor Diameter	0.50±0.008mm
Insulation Type	HDPE
Insulation Thickness	0.22mm
Insulation Diameter	0.97±0.03mm
Separation	MYLAR 0.025 x 20 mm
Anti-Crosstalk Divider	LDPE 4.4 x 0.35 mm
Cable Shield (Aluminum Foil)	0.05±0.01mm
ESD Drain Wire	0.4±0.05mm
Rip Cord	YES
Secondary Cable Shield (Braid)	6.0±0.0005mm
Jacket Material	MDPE
Jacket Thickness	0.55 mm
Jacket Outer Diameter	7.0±0.3mm
Jacket Color	Black
Conductor Resistance (max)	95Ω/km
Attenuation @ 250MHz	32.8dB/100m
Environment	Indoor/Outdoor

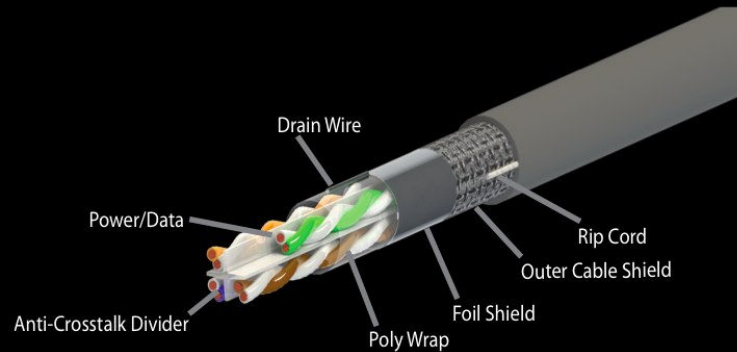

Optional Accessories

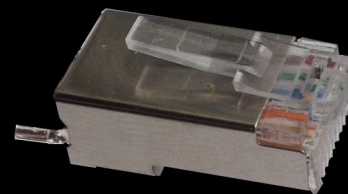

ARC-AF-F6C-CON
Shielded Connector



ARC-AF-F6C-K
Locking Boot Key



ARC-AF-F6C-L
Locking Boot Lock



ARC-AF-F6C-B-S
Cable Locking Boot